

Safety Precautions

User Registration

User Registration


Before installation, please read the following precautions carefully to prevent risks and dangers to this product, users and any other person.

QUICK START GUIDE

Applicable Model: G4

Version: V1.0 Date: Oct 2018





Do not expose to direct sunlight, water, dust and soot.

Do not place any magnetic objects near the product. Magnetic objects such as magnets, CRT, TV, monitors or speakers may damage the device.

Do not place the device next to any heating equipment.



This product is not intended for use by children unless they are supervised.

Do not drop or damage the device.


Do not disassemble, repair or modify the device.

Do not use the device for any purpose other than those specified.

1

Remove dusts or dirts regularly. While cleaning, wipe dust off with a smooth cloth or towel instead of water.


Contact your supplier in case of any problem!



1) Recommended distance


For users with height from 1.5m to 1.8m, the recommended device height is 1.55m. It can be adjusted and installed according to the users' average height.

The recommended position



The registration and verification position of the device should not be changed to avoid affecting the verification accuracy. If it is necessary to move the device, then move it horizontally and keep the vertical height same.

2) The recommended and not-recommended facial expressions:

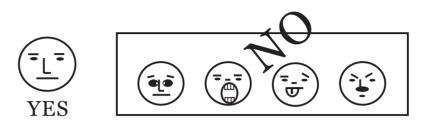

2


3) Registration

During registration, please adjust your position and keep your face inside the green frame.






3









4

Device Overview




Product PIN Diagram

Device Overview

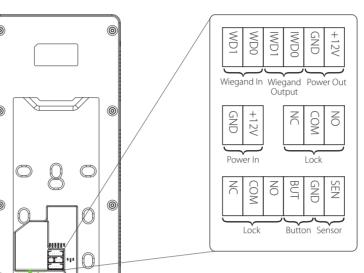


Product Installation







Longgang District, Shenzhen China 518129 Tel: +86 755-89602345

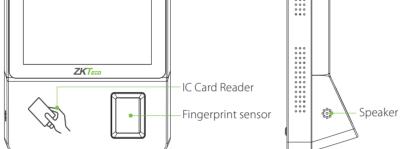


4





Product Dimensions

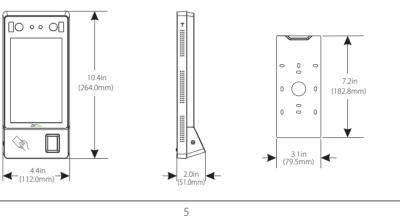

SEN

GND

BUT

NO

COM

NC

COM

NC

GND

IWD0

IWD1

WD0


WD1

Wiegand Device Wiegand In Port ① Paste the mounting template sticker onto the wall, and drill holes according to it. ② Fix the back plate to the wall with wall mounting screws. 3 Attach the device to the back plate. (4) Fasten the device to the back plate with a security screw.


6

Ethernet & Power Connection

LAN Connection

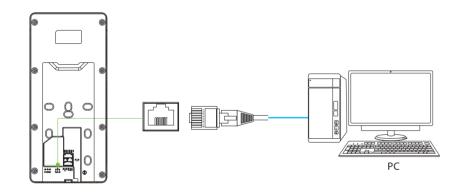

Power Connection

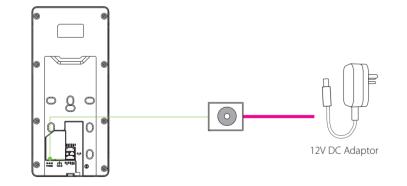

Recommended power supply

Rating of 12V and 3A


• To share the device's power with other devices, use a power supply with higher current ratings.

7


Lock Relay Connection

The system supports Normally Opened Lock and Normally Closed Lock. The diagrams shown hereafter represents Normally Closed Lock.

Device not sharing power with the lock is shown below:

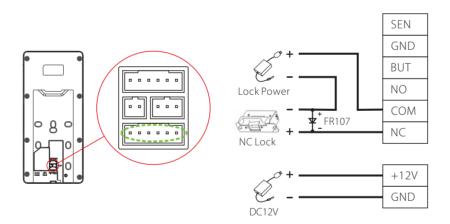


Device sharing power with the lock is shown below:

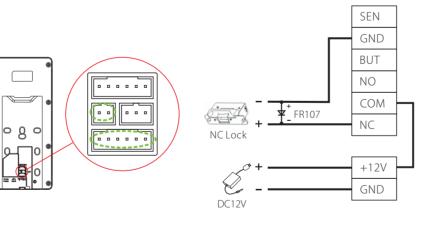


8

Connecting Other Devices


Button & Sensor Connection




Alarm Connection



Wiegand Connection



Standalone Installation

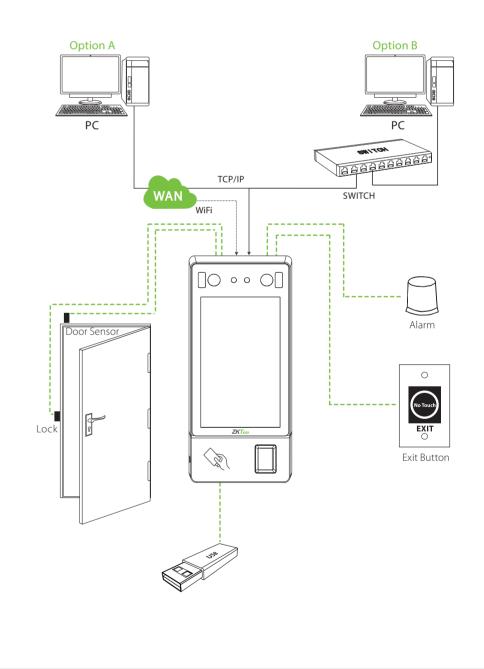

9

10


Menu Functions


Menu Functions

Menu Functions

Menu Functions & Troubleshooting



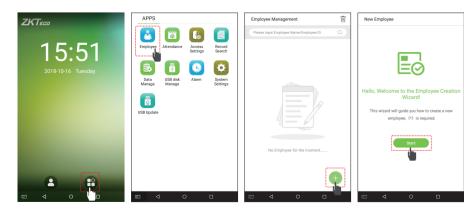

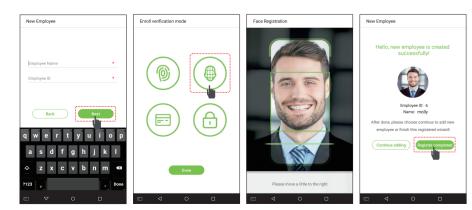

Go to Main Menu > Employee Management > - > New Employee > Enroll verification mode. Settings include entering Employee Name, ID, choosing User Role (Normal User is not authorized to operate the menu options of the device. Super Admin can operate all the menu options of the device), registering Fingerprint, Face Registration, Enroll Badge Number (ID and Mifare card are optional), and setting Password.

Access Settings



Go to Main Menu > Access Settings > Access control parameters to enter Access control parameters setting interface.

Network Settings

Teca	APPS		System Settings	Network Settings	
			Network Settings	Ethernet Settings	
15:51 2018-10-16 Tuesday	Employee Attendance		Date and Time	State	
	Linpoyee Atendance	Settings Search	ATT Parameters	DHCP	Disconnected >
	5 7			IP Address	0.0.0.0
	Data US8 disk	Alarm System Setting	Cloud Service Settings	Subnet Mask	0.0.0.0
	Manage Manage	Settings	Wiegand Settings		
		_	Display Settings	Gateway Address	0.0.0.0
	USB Update		Sound Settings	DNS	0.0.0.0
			Biometric parameters	TCP COMM.Port	4370 🖊
			Auto-testing		
			Advanced Settings		
			About Device		
		0 0		⊲ 0	0

Go to Main Menu > System Settings > Network Settings, set the IP Address. The device will communicate with PC via the Ethernet parameters. Using Cloud Service Settings sets Server Address and Server port according to the server.

Record Search



View records in the device:

Go to Main Menu > Record Search > Att Log enter Name or Employee ID (if user ID field is left blank, records of all users will be displayed) > select Time Range > press OK, the corresponding attendance logs will be displayed.

View records on computer:

Go to Main Menu> USB disk Management > USB disk Download. Insert the USB disk correctly and download the data to the USB drive, then copy this data from the USB drive to your PC. The downloaded data filename will be "Device Serial Number.dat", you can open and view it.

Date and Time Settings



Go to Main Menu > System Settings > Date and Time, to enter Date and Time setting interface.

Troubleshooting

1. Fingerprint cannot be detected or it takes too long.

> Check whether the finger or fingerprint sensor is stained with sweat, water or dust. > Retry after wiping the finger and fingerprint sensor with dry paper tissue or a mildly wet cloth.

 \succ If the fingerprint is too dry, blow the finger and retry.

- 2. Failed to gain access after successful verification.
- > Check with administrator whether the enrolled fingerprint has been deleted from the device.
- 3. Door does not open after successful verification.
- > Check if the lock open duration parameter is set appropriately.